



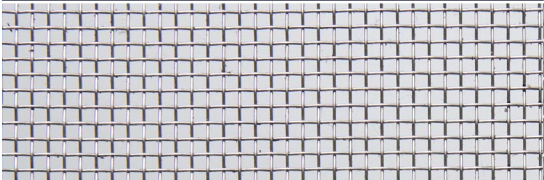


EMBER STOP MESH - UNCOATED STAINLESS STEEL

EMBER STOP MESH	Tough		Ultra Extreme	
				
Roll	 Roll		 Roll	
Grade	304 / 316		304 / 316	
Finish	Uncoated- Mill Finish		Uncoated- Mill Finish	
Aperture	1.67 mm		1.64 mm	
Diameter	0.45 mm		0.90 mm	
Mesh (openings per lineal inch)	12 x 12		10 x 10	
Open Area %	62 %		42 %	
BAL 12.5 - FZ 	✓		✓	
Formability	Self Supporting		Self Supporting	
Rigidity	Flexible		Ridgid	
Cutting	Tin Snips		Guillotine / Grinder	
Dimensions	304	316	304	316
W mm x L 30 m	915 mm	915 mm	915 mm	-
	1245 mm	1245 mm	1245 mm	1245 mm
	1550 mm	1550 mm	1550 mm	1550 mm
	-	1830 mm	-	-

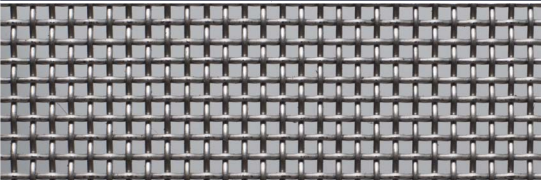

SSWM bushfire mesh can be used to meet the requirements of AS3959-2009 Amdt 3 for BAL 12.5 -FZ, where mesh is referenced and if the prescribed construction requirements are met.



If the mesh is being used externally for aesthetic purposes, to minimise tea staining it is recommended that the mesh is pickled, passivated and electroplished.



Regular cleaning is recommended to prevent the build-up of contaminants such as dirt and salt.