








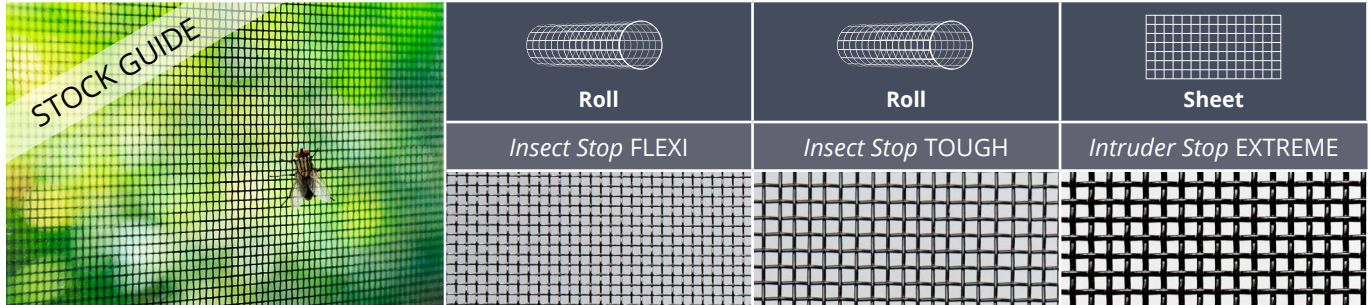

**INSECT / INTRUDER STOP - BLACK POWDER COATED STAINLESS STEEL**




Parent Product Code <i>see 'Data Sheet' for complete Product Codes</i>	SSWOB 01230 ....	SSWOB 01670 ....	SSWOB 01510 ....
<b>Grade</b>	316	316	304 / 316
<b>Aperture</b>	1.23 mm	1.67 mm	1.51 mm
<b>Diameter</b>	0.18 mm	0.45 mm	0.8 mm
<b>Mesh (openings per lineal inch)</b>	18 x 18	12 x 12	11 x 11
<b>Open Area %</b> <i>Pre black powder coat finish</i>	76 %	62 %	43 %
<b>BAL 12.5 - FZ</b> 	✓	✓	✓
<b>Neutral Salt Spray Test (1000 hrs)</b> 		✓	✓
<b>Knife Shear Test</b> 			✓
<b>Formability</b>	Malleable	Self Supporting	Self Supporting
<b>Rigidity</b>	Soft	Flexible	Rigid
<b>Cutting</b>	Scissors	Tin Snips	Guillotine / Grinder
<b>Other uses</b>	Insect Mesh	Pet Mesh	Security Mesh
<b>Dimensions W x L</b>	<b>316</b>	<b>316</b>	<b>304 / 316</b>
	610 mm x 30 m	190 mm x 30 m	750 mm x 2000 mm
	915 mm x 15 m	915 mm x 15 m	750 mm x 2400 mm
	915 mm x 30 m	915 mm x 30 m	900 mm x 2000 mm
	1220 mm x 15 m	1245 mm x 15 m	900 mm x 2400 mm
	1220 mm x 30 m	1245 mm x 30 m	1200 mm x 2000 mm
	1550 mm x 15 m	1550 mm x 15 m	1200 mm x 2400 mm
	1550 mm x 30 m	1550 mm x 30 m	1500 mm x 2000 mm
	-	-	1500 mm x 2400 mm

 **Australian Standards:**  
SSWM bushfire mesh can be used to meet the requirements of AS3959-2018 Amdt 1 for BAL 12.5 -FZ, where mesh is referenced and if the prescribed construction requirements are met.

 **AS 2331.3.1 2001 'Neutral Salt Spray Test'**  
1000 Hours - no corrosion.

 **AS 5041 2003 'Knife Shear Test'** Passed.

 **Cleaning, Care & Maintenance:**  
Regular cleaning is recommended to prevent the build-up of contaminants such as dirt and salt.

**Technical Information to assist with selection, specifying & ordering**



 **Technical Data Sheets:**  
See 'Technical Data Sheet' for complete Product Codes & Dimensions.




 **Samples:**  
Contact sales@sswm.com.au to request your sample pack.



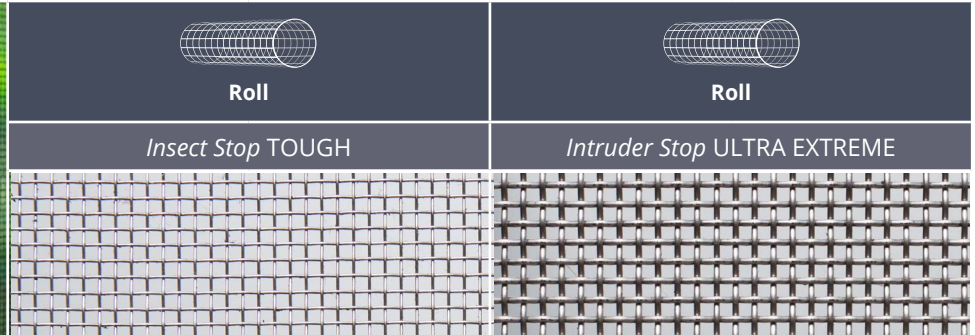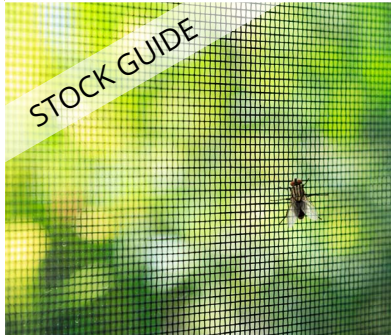

January 2020






**INSECT / INTRUDER STOP - UNCOATED (MILL FINISH) STAINLESS STEEL**



<b>Parent Product Code</b> <i>see 'Data Sheet' for complete Product Codes</i>	SSWO 01670 ....		SSWO 01640 ....	
<b>Grade</b>	304 / 316		304 / 316	
<b>Aperture</b>	1.67 mm		1.64 mm	
<b>Diameter</b>	0.45 mm		0.90 mm	
<b>Mesh (openings per lineal inch)</b>	12 x 12		10 x 10	
<b>Open Area %</b>	62 %		42 %	
<b>BAL 12.5 - FZ</b> 	✓		✓	
<b>Neutral Salt Spray Test</b> 			✓	
<b>Knife Shear Test</b> 			✓	
<b>Formability</b>	Self Supporting		Self Supporting	
<b>Rigidity</b>	Flexible		Rigid	
<b>Cutting</b>	Tin Snips		Guillotine / Grinder	
<b>Other uses</b>	Pet Mesh		Security Mesh	
<b>Dimensions W mm x L 30 m</b>	<b>304</b>	<b>316</b>	<b>304</b>	<b>316</b>
	915 mm	915 mm	915 mm	-
	1245 mm	1245 mm	1245 mm	1245 mm
	1550 mm	1550 mm	1550 mm	1550 mm
	-	1830 mm	-	-

-  **Australian Standards:**  
SSWM bushfire mesh can be used to meet the requirements of AS3959-2018 Amdt 1 for BAL 12.5 -FZ, where mesh is referenced and if the prescribed construction requirements are met.
-  **AS 2331.3.1 2001 'Neutral Salt Spray Test'**  
1000 Hours - no corrosion.
-  **AS 5041 2003 'Knife Shear Test' Passed.**
-  If the mesh is being used externally for aesthetic purposes, to minimise tea staining it is recommended that the mesh is pickled, passivated and electropolished.

-  **Cleaning, Care & Maintenance:**  
Regular cleaning is recommended to prevent the build-up of contaminants such as dirt and salt.
- Technical Information to assist with selection, specifying & ordering**
-  **Technical Data Sheets:**  
See 'Technical Data Sheet' for complete Product Codes & Dimensions.
-  **Samples:**  
Contact sales@sswm.com.au to request your sample pack.

January 2020