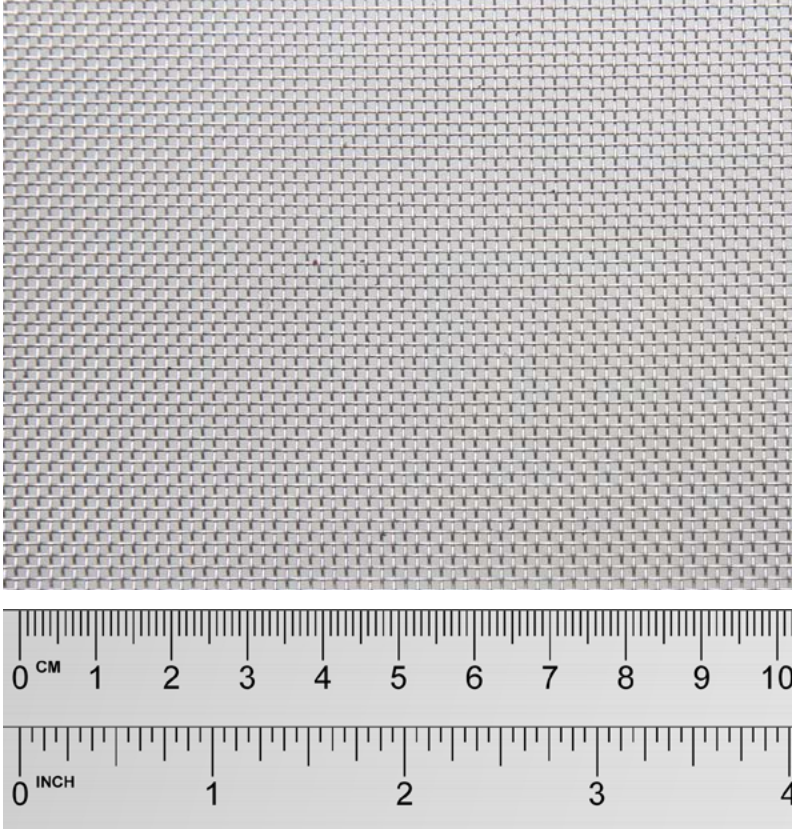



| | | | |
|--|--|---|--|
|  Look Us Up www.sswm.com.au |  Email Us sales@sswm.com.au |  Call Us 1300 305 148 |  Superior Quality THE LASTING DECISION |
|--|--|---|--|



Images are provided as a guide only

| METRIC | |
|---|-----------------------|
|  | Aperture 1.14 mm |
| | Wire Diameter 0.45 mm |




| NEAREST IMPERIAL | |
|------------------|----|
| Mesh | 16 |
| SWG | 26 |

| | |
|--------------------------|------------------------|
| Stock Status | Stocked |
| Finish | Nil |
| Weave Type | Plain Weave |
| Approx Kg/m ² | 1.66 Kg/m ² |
| Approx % Open Area | 51 % |

| TESTING / STANDARD |
|---|
| Mesh is Tested / Manufactured to [^] |
| ASTM E2016-15 'Standard Specification for Industrial Woven Wire Cloth' ✓ |

[^] Refer to Product Page for further information

Product Page www.sswm.com.au/product/stainless-steel-woven-wire-mesh
 Care Page www.sswm.com.au/stainless-steel-cleaning-maintenance
 Glossary Page www.sswm.com.au/what-is-stainless-steel

| PRODUCT CODE | GRADE |  Width mm |  Length m |  Diam. mm | APPROX Kg/ROLL |
|-----------------|-------|--|---|--|----------------|
| SSWO 01140 1244 | 304 | 1245 mm | 30 m | 200 mm | 62 Kg |
| SSWO 01140 1554 | 304 | 1550 mm | 30 m | 200 mm | 77 Kg |