



Look Us Up  
[www.sswm.com.au](http://www.sswm.com.au)



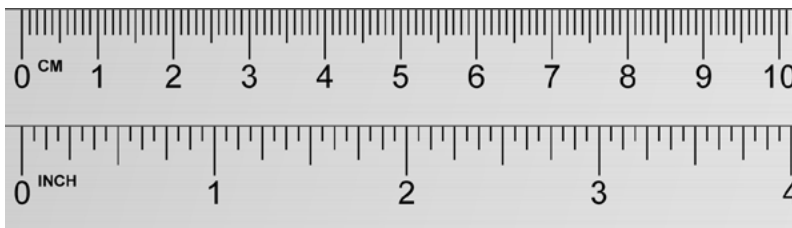
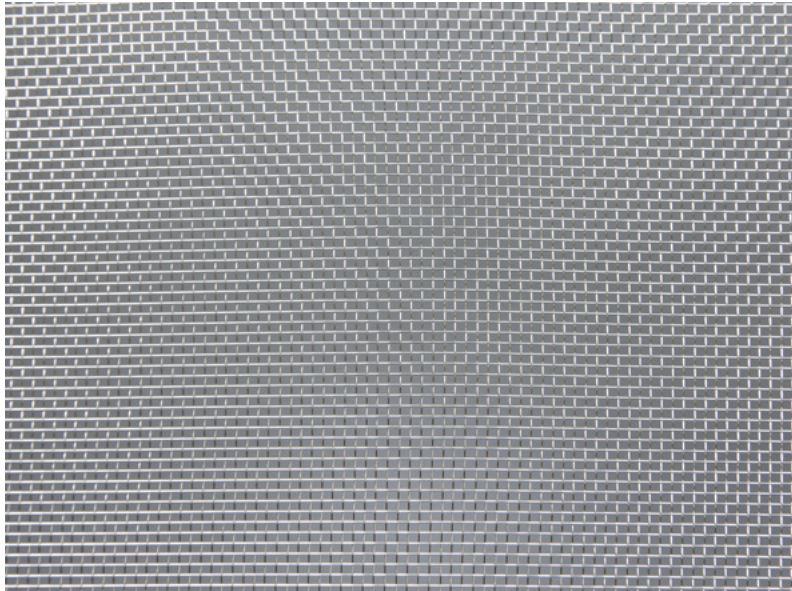
Email Us  
[sales@sswm.com.au](mailto:sales@sswm.com.au)



Call Us  
1300 305 148




Superior Quality  
THE LASTING DECISION



Images are provided as a guide only

**Product Page** [www.sswm.com.au/product/woven-mesh](http://www.sswm.com.au/product/woven-mesh)  
**Care Page** [www.sswm.com.au/stainless-steel-cleaning-maintenance](http://www.sswm.com.au/stainless-steel-cleaning-maintenance)  
**Glossary Page** [www.sswm.com.au/what-is-stainless-steel](http://www.sswm.com.au/what-is-stainless-steel)




METRIC	
	<b>Aperture</b> 1.23 mm
	<b>Wire Diameter</b> 0.18 mm

NEAREST IMPERIAL	
<b>Mesh</b>	18
<b>SWG</b>	36.5

<b>Stock Status</b>	Stocked
<b>Finish</b>	Nil
<b>Weave Type</b>	Plain Weave
<b>Approx Kg/m<sup>2</sup></b>	0.30 Kg/m <sup>2</sup>
<b>Approx % Open Area</b>	76 %

TESTING / STANDARD	
Mesh is Tested / Manufactured to <sup>^</sup>	
<b>ASTM E2016-15</b> 'Standard Specification for Industrial Woven Wire Cloth'	✓
<b>AS 3959</b> ember protection of openings 'Construction of Buildings in Bushfire Prone Areas' 2009	✓ Aperture < 2mm

<sup>^</sup> Refer to Product Page for further information

PRODUCT CODE	GRADE	 Width mm	 Length m	 Diam. mm	APPROX Kg/ROLL
SSWO 01230 1226 30	316	1220 mm	30 m	120 mm	11 Kg