



Perf Sheet R00.5 T1.0



Hole R	0.50 mm	Sheets: 2000 x 1000 mm
Pitch T	1.09 mm	
Hole Type	Round	
Thickness	0.40 mm	
% Open	19 % Approx	
Grade	304	

Perf Sheet R00.8 T1.5




Hole R	0.80 mm	Sheets: 2000 x 1000 mm
Pitch T	1.50 mm	
Hole Type	Round	
Thickness	0.50 mm	
% Open	26 % Approx	
Grade	304	

Perf Sheet R01.0 T2.0




Hole R	1.00 mm	Sheets: 2000 x 1000 mm
Pitch T	2.00 mm	
Hole Type	Round	
Thickness	0.50 / 1.00 mm	
% Open	23 % Approx	
Grade	304	

Perf Sheet R01.1 T2.0

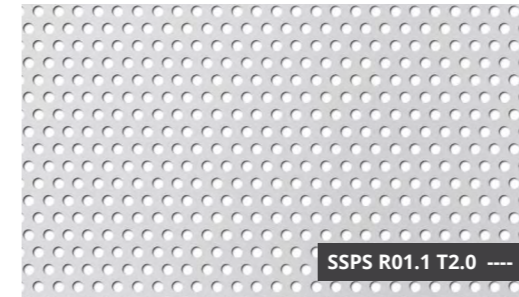


Hole R	1.10 mm	Sheets: 2000 x 1000 mm
Pitch T	2.00 mm	
Hole Type	Round	
Thickness	0.80 mm	
% Open	23 % Approx	
Grade	316	

Perf Sheet R01.5 T2.6

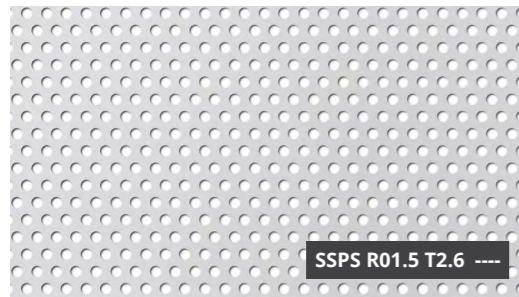


Hole R	1.50 mm	Sheets: 2000 x 1000 mm
Pitch T	2.60 mm	
Hole Type	Round	
Thickness	1.00 mm	
% Open	30 % Approx	
Grade	304	

Perf Sheet R02.0 T3.0

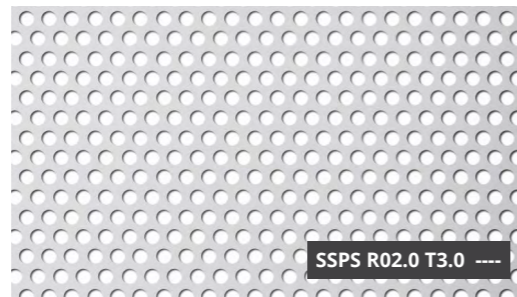


Hole R	2.00 mm	Sheets: 2000 x 1000 mm
Pitch T	3.00 mm	
Hole Type	Round	
Thickness	1.00 mm	
% Open	40 % Approx	
Grade	304	

Perf Sheet R02.0 T3.5

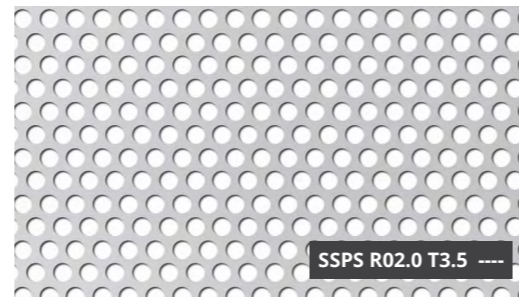


Hole R	2.00 mm	Sheets: 2000 x 1000 mm
Pitch T	3.50 mm	
Hole Type	Round	
Thickness	1.00 / 1.50 mm	
% Open	30 % Approx	
Grade	304 / 316	


Perf Sheet R03.0 T4.0

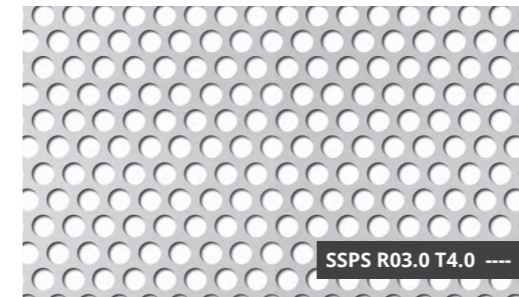


Hole R	3.00 mm	Sheets: 2000 x 1000 mm
Pitch T	4.00 mm	
Hole Type	Round	
Thickness	1.00 mm	
% Open	51 % Approx	
Grade	304 / 316	

Perf Sheet R03.0 T5.0

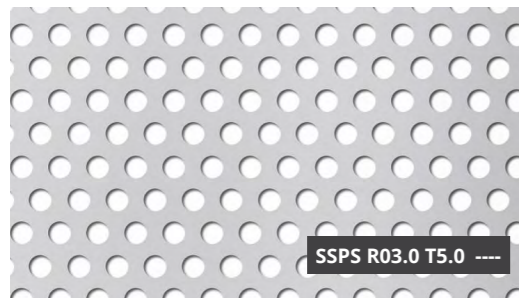


Hole R	3.00 mm	Sheets: 2000 x 1000 mm
Pitch T	5.00 mm	
Hole Type	Round	
Thickness	1.00 / 1.50 / 2.00 mm	
% Open	33 % Approx	
Grade	304 / 316	

Perf Sheet R04.0 T5.0

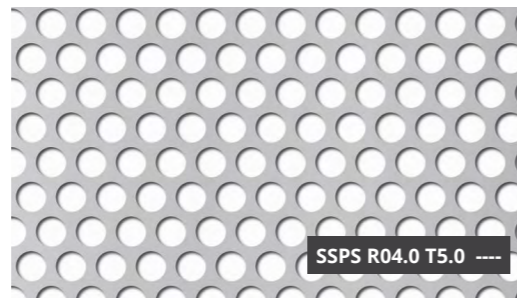


Hole R	4.00 mm	Sheets: 2000 x 1000 mm
Pitch T	5.00 mm	
Hole Type	Round	
Thickness	1.00 mm	
% Open	58 % Approx	
Grade	304	

Perf Sheet R05.0 T6.0

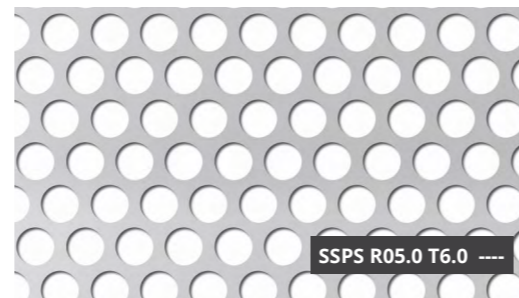


Hole R	5.00 mm	Sheets: 2000 x 1000 mm
Pitch T	6.00 mm	
Hole Type	Round	
Thickness	1.00 mm	
% Open	63 % Approx	
Grade	304	


Perf Sheet R05.0 T6.5

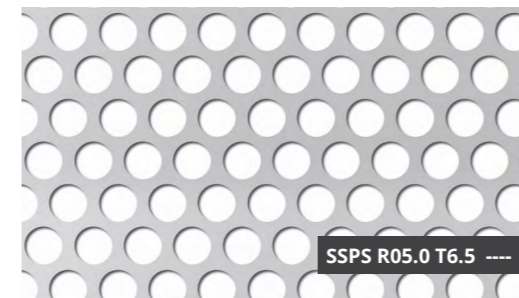


Hole R	5.00 mm	Sheets: 2000 x 1000 mm
Pitch T	6.50 mm	
Hole Type	Round	
Thickness	1.50 mm	
% Open	54 % Approx	
Grade	304	


You have made 'The Lasting Decision' and now it is time to evaluate 'The Lasting Look'.

 **Design & Install Considerations:**
Practical information for your consideration.

 **Cleaning, Care & Maintenance:**
Regular cleaning is recommended to prevent the build-up of contaminants such as dirt and salt.

Technical Information to assist with selection & specifying



 **Technical Data Sheets:**
Our technical data sheets are an incredibly powerful tool and available on sswm.com.au

 **Samples:**
Please contact sales@sswm.com.au to request samples of our Perforated Sheet range to determine which best meets your requirements.

Glossary Perforated Sheets:

Hole (R) - SSWM stock round holes in a triangular pattern
Pitch (T) - is the measurement from the centre of one hole to the centre of the adjacent hole. Pitch determines how closely spaced the perforated holes are. It is a deciding factor in the design, function and strength of the finished product.

Thickness - the thickness of the sheet before processing.
% Open - the percentage of all the holes in the total sheet surface.

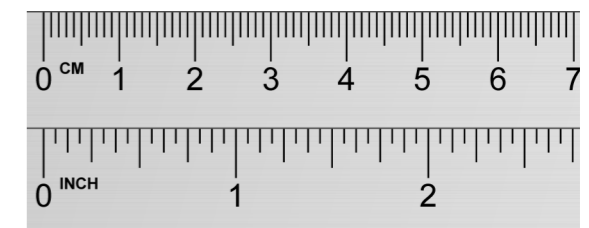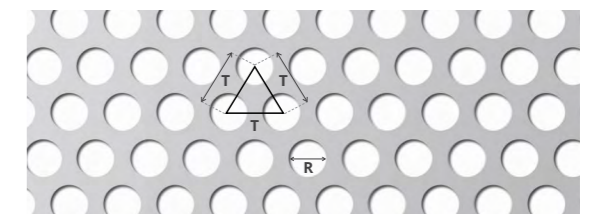


This document is to scale when printed to A3 with no scaling applied. Please use ruler above to check your scale. Images are provided as a guide only.

Images are provided as a guide only.

May 2022



Perf Sheet R05.0 T7.0

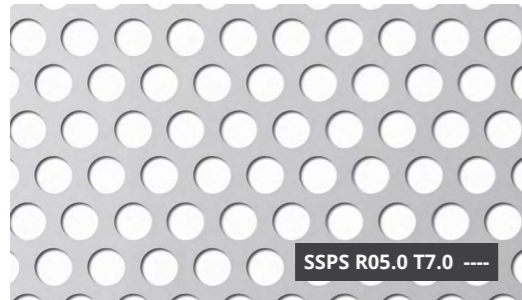


Hole R 5.00 mm
Pitch T 7.00 mm
Hole Type Round
Thickness 1.00 mm
% Open 46 % Approx
Grade 304 / 316

SSPS R05.0 T7.0 ----

Sheets:
2000 x 1000 mm



Perf Sheet R05.0 T8.0

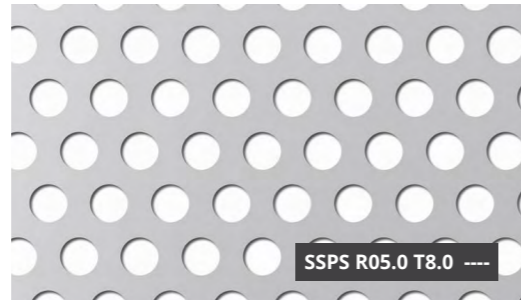


Hole R 5.00 mm
Pitch T 8.00 mm
Hole Type Round
Thickness 1.50 mm
% Open 35 % Approx
Grade 304 / 316

SSPS R05.0 T8.0 ----

Sheets:
2000 x 1000 mm
2500 x 1000 mm



Perf Sheet R06.0 T9.0

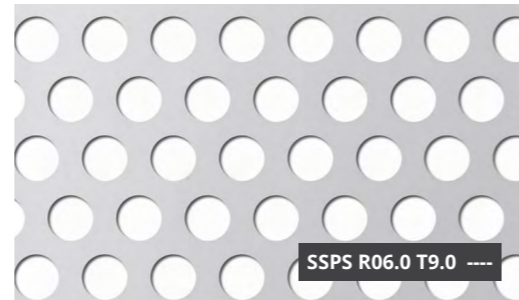


Hole R 6.00 mm
Pitch T 9.00 mm
Hole Type Round
Thickness 1.50 mm
% Open 40 % Approx
Grade 304

SSPS R06.0 T9.0 ----

Sheets:
2000 x 1000 mm



Perf Sheet R08.0 T11.0

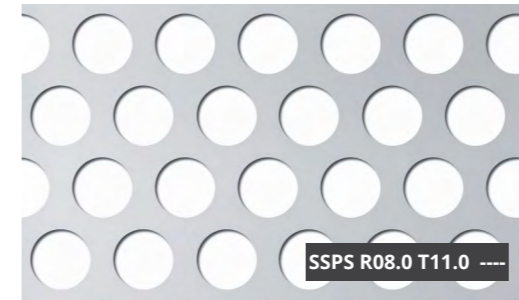

Hole R 8.00 mm
Pitch T 11.00 mm
Hole Type Round
Thickness 1.50 mm
% Open 47 % Approx
Grade 304

SSPS R08.0 T11.0 ----

Sheets:
2000 x 1000 mm



Perf Sheet R08.0 T12.0



Hole R 8.00 mm
Pitch T 12.00 mm
Hole Type Round
Thickness 1.50 mm
% Open 40 % Approx
Grade 304

SSPS R08.0 T12.0 ----

Sheets:
2000 x 1000 mm



Perf Sheet R10.0 T12.7



Hole R 10.00 mm
Pitch T 12.70 mm
Hole Type Round
Thickness 1.00 mm
% Open 53 % Approx
Grade 304

SSPS R10.0 T12.7 ----

Sheets:
2000 x 1000 mm
2500 x 1250 mm




Perf Sheet R10.0 T15.0



Hole R 10.00 mm
Pitch T 15.00 mm
Hole Type Round
Thickness 1.50 mm / 2.0 mm
% Open 40 % Approx
Grade 304 / 316

SSPS R10.0 T15.0 ----

Sheets:
2000 x 1000 mm
2500 x 1250 mm



Perf Sheet R12.0 T16.0



Hole R 12.00 mm
Pitch T 16.00 mm
Hole Type Round
Thickness 1.50 mm
% Open 51 % Approx
Grade 304

SSPS R12.0 T16.0 ----

Sheets:
2000 x 1000 mm



Perf Sheet R15.0 T21.0




Hole R 15.00 mm
Pitch T 21.00 mm
Hole Type Round
Thickness 1.50 mm
% Open 46 % Approx
Grade 304


SSPS R15.0 T21.0 ----

Sheets:
2000 x 1000 mm





You have made 'The Lasting Decision' and now it is time to evaluate 'The Lasting Look'.

 **Design & Install Considerations:**
Practical information for your consideration.

 **Cleaning, Care & Maintenance:**
Regular cleaning is recommended to prevent the build-up of contaminants such as dirt and salt.

Technical Information to assist with selection & specifying



 **Technical Data Sheets:**
Our technical data sheets are an incredibly powerful tool and available on sswm.com.au

 **Samples:**
Please contact sales@sswm.com.au to request samples of our Perforated Sheet range to determine which best meets your requirements.

Glossary Perforated Sheets:

Hole (R) - SSWM stock round holes in a triangular pattern
Pitch (T) - is the measurement from the centre of one hole to the centre of the adjacent hole. Pitch determines how closely spaced the perforated holes are. It is a deciding factor in the design, function and strength of the finished product.

Thickness - the thickness of the sheet before processing.
% Open - the percentage of all the holes in the total sheet surface.

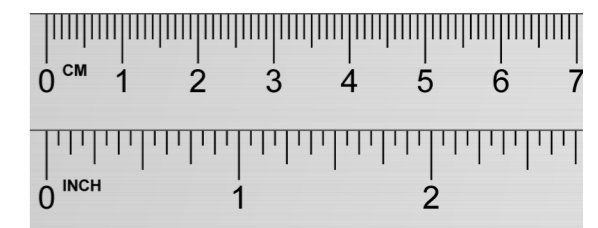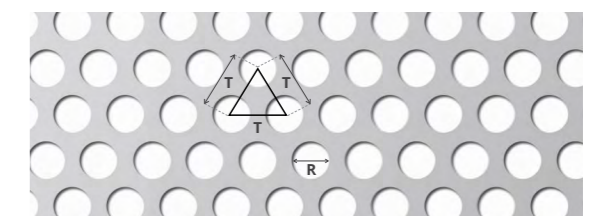

This document is to scale when printed to A3 with no scaling applied. Please use ruler above to check your scale. Images are provided as a guide only.