



Look Us Up
www.sswm.com.au




Email Us
sales@sswm.com.au



Call Us
1300 305 148




Superior Quality
THE LASTING DECISION

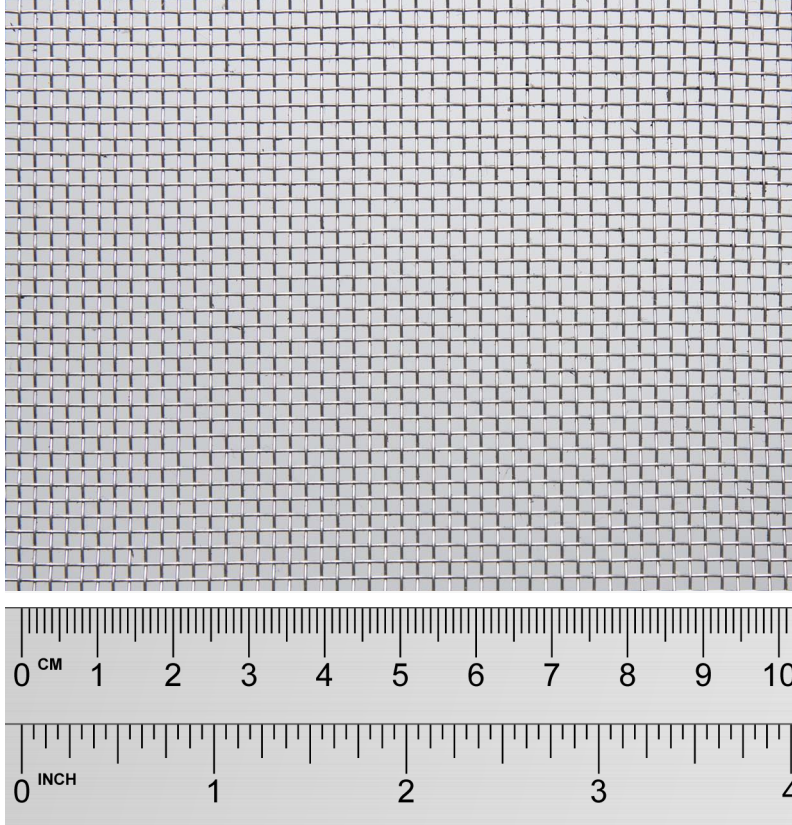

Images are provided as a guide only

Product Page www.sswm.com.au/product/bushfire-mesh
Care Page www.sswm.com.au/stainless-steel-cleaning-maintenance
Glossary Page www.sswm.com.au/what-is-stainless-steel

METRIC	
	Aperture 1.67 mm
	Wire Diameter 0.45 mm

NEAREST IMPERIAL	
Mesh	12
SWG	26

Stock Status	Stocked
Finish	Uncoated Mill Finish
Weave Type	Plain Weave
Approx Kg/m²	1.24 kg/m ²
Approx % Open Area	62 %

TESTING / STANDARDS	
Mesh is Tested / Manufactured to [^]	
ASTM E2016-15 <small>'Standard Specification for Industrial Woven Wire Cloth'</small>	✓
AS 3959 -2009 Amdt 3 <small>'Construction of Buildings in Bushfire Prone Areas'</small>	✓ Aperture < 2mm Corrosion Resistant Non Combustible
FCO-3313 <small>CSIRO Advisory Report regarding 'Bushfire Mesh' range & criteria of AS 3959-2009</small>	✓ BAL 12.5 - FZ if used in the prescribed construction manner

[^] Refer to the following link for further information
<https://www.sswm.com.au/product/stainless-steel-bushfire-mesh/#testing>

PRODUCT CODE	GRADE	 Width mm	 Length m	 Diam. mm	APPROX Kg/ROLL
SSWO 01670 0914	304	915 mm	30 m	200 mm	34 Kg
SSWO 01670 0916	316	915 mm	30 m	200 mm	34 Kg
SSWO 01670 1244	304	1245 mm	30 m	200 mm	46 Kg
SSWO 01670 1246	316	1245 mm	30 m	200 mm	46 Kg
SSWO 01670 1554	304	1550 mm	30 m	200 mm	58 Kg
SSWO 01670 1556	316	1550 mm	30 m	200 mm	58 Kg
SSWO 01670 1836 30	316	1830 mm	30 m	200 mm	68 Kg

HEAD OFFICE - Sales & Warehouse 3 Commercial Court, Tullamarine VIC 3043, Australia
t 1300 305 148 f 1300 305 805 Int t +613 9448 9048 Int f +613 8669 4506
sales@sswm.com.au www.sswm.com.au