



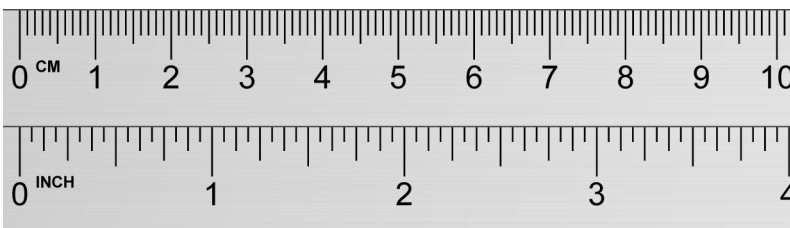

PARENT PRODUCT CODE **SSWO 01640 - - - -**


See table below for complete product codes

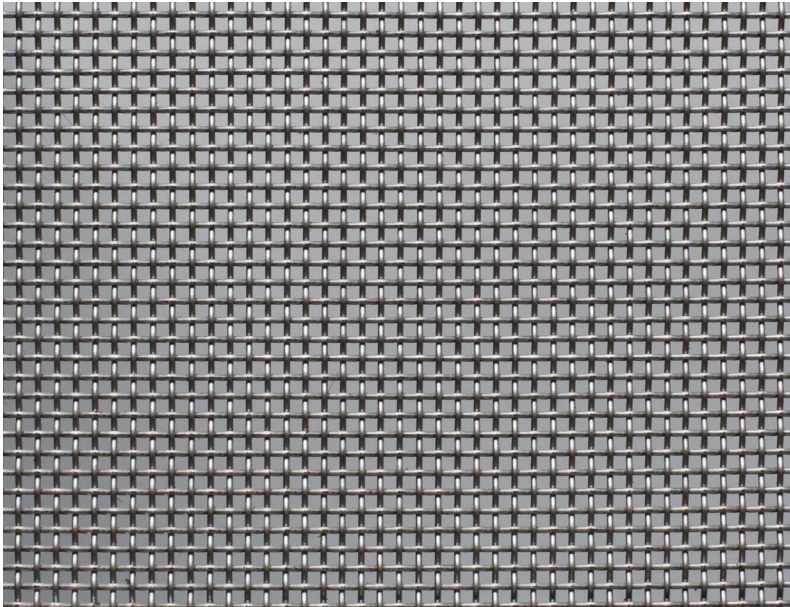

This document is to scale when printed to A4 with no scaling applied. Please use ruler above to check your scale. Images are provided as a guide only.

Product Page www.sswm.com.au/product/stainless-steel-woven-wire-mesh
Care Page www.sswm.com.au/stainless-steel-cleaning-maintenance
Glossary Page www.sswm.com.au/what-is-stainless-steel

METRIC



Aperture 1.64mm
Wire Diameter 0.90 mm

NEAREST IMPERIAL

Mesh 10
SWG 20

Stock Status Stocked
Finish Nil
Weave Type Plain Weave
Approx Kg/m² 4.16 Kg/m²
Approx % Open Area 42 %

TESTING / STANDARDS
 Mesh is Tested / Manufactured to[^]

- ASTM E2016-15** ✓ Manufactured to
Standard Specification for Industrial Woven Wire Cloth
- AS 3959 -2018Amdt 1** ✓ Aperture < 2mm
Construction of Buildings in Corrosion Resistant
Bushfire Prone Areas Non Combustible
- AS 5041 2003** ✓ Passed
Knife Shear Test
- FCO-3313 Rev B** ✓ BAL 12.7 - FZ
CSIRO Advisory Report regarding If used in the
'Bushfire Mesh' range & criteria of AS prescribed
3959-2018Amdt 1 construction manner

Testing / Standards Information

www.sswm.com.au/product/stainless-steel-bushfire-mesh/#testing

| PRODUCT CODE | GRADE | Width mm | Length m | Diam. mm | APPROX Kg/Roll |
|-----------------|-------|----------|----------|----------|----------------|
| SSWO 01640 0914 | 304 | 915 mm | 30 m | 250 mm | 114 Kg |
| SSWO 01640 1244 | 304 | 1245 mm | 30 m | 250 mm | 155 Kg |
| SSWO 01640 1246 | 316 | 1245 mm | 30 m | 250 mm | 155 Kg |
| SSWO 01640 1504 | 304 | 1500 mm | 30 m | 250 mm | 187 Kg |
| SSWO 01640 1554 | 304 | 1550 mm | 30 m | 250 mm | 193 Kg |
| SSWO 01640 1556 | 316 | 1550 mm | 30 m | 250 mm | 193 Kg |



tel 1300 305 148 sales@sswm.com.au www.sswm.com.au
 AUSTRALIA'S LARGEST STOCKIST OF STAINLESS STEEL WIRE & MESH

Superior Quality
 THE LASTING DECISION

January 2020 | 1- 34